


Ceiling swirl diffusers

Type BBHM




Circular diffuser face



Plenum box
with damper blade
and square diffuser face



Horizontal
swirling air discharge

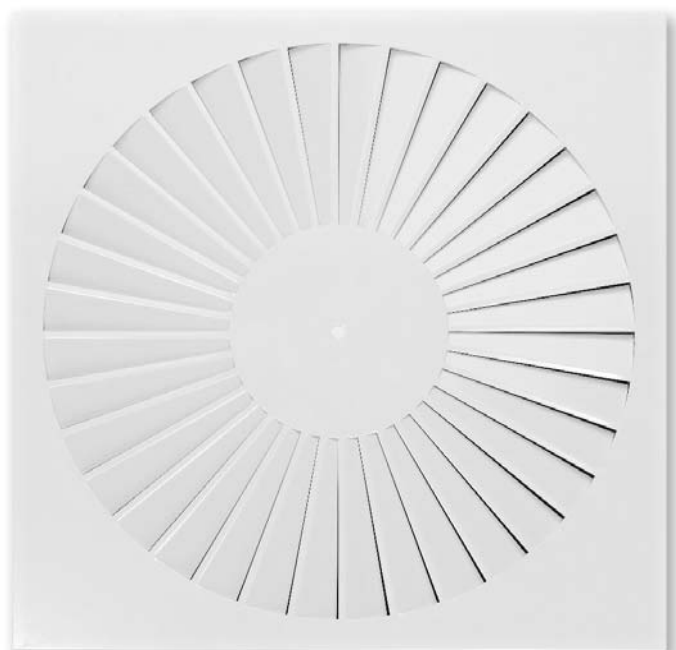

For comfort zones, with fixed air control blades

Circular and square ceiling swirl diffusers that create high induction levels, for high room air change rates

- Nominal sizes 300, 400, 500, 600, 625
- Volume flow rate range 9 – 235 l/s or 31 – 846 m³/h
- Diffuser face made of galvanised sheet steel, powder-coated
- For supply and extract air
- For variable and constant volume flows
- For all types of ceiling systems,
and with an extended border also suitable for freely suspended installation
- High induction results in a rapid reduction of temperature differences and airflow velocities
- Air change rates of up to 35 per hour can be achieved by arranging several diffusers in a row with a minimum pitch of 0.9 m (centre line to centre line)
- Ideal for comfort zones

Optional equipment and accessories


- Exposed diffuser face available in RAL CLASSIC colours
- Plenum box with cord-operated damper blade and pressure tap

Type		Page
BBHM	General information	1.1 – 84
	Quick sizing	1.1 – 89
	Dimensions and weight – BBHM-Q	1.1 – 90
	Dimensions and weight – BBHM-R	1.1 – 94
	Installation details	1.1 – 98
	Specification text	1.1 – 99
	Basic information and nomenclature	1.6 – 1

Diffuser faces

Product examples

BBHMQ



BBHMR



Installation examples

Installation in T-bar ceilings



Installation in T-bar ceilings,
arrangement in a row



Installation in continuous ceilings



Description

For detailed information on plenum boxes see Chapter K1 – 1.5.

Application

- Type BBHM ceiling swirl diffusers are used as supply air or extract air diffusers for comfort zones
- Attractive design element for building owners and architects with demanding aesthetic requirements
- Horizontal swirling supply air discharge for mixed flow ventilation
- The efficient swirl creates high induction levels, thereby rapidly reducing temperature differences and airflow velocities (supply air variant)
- For variable and constant volume flows
- For supply air to room air temperature differences from –12 to +10 K
- For room heights up to 4 m (lower edge of suspended ceiling)
- For all types of ceiling systems
- With an extended border also suitable for freely suspended installation (supply air variant)

Variants

- BBHM-Q: Square diffuser face
- BBHM-R: Circular diffuser face
- BBHM-*-Z: Supply air
- BBHM-*-A: Extract air

Connection

- H: Horizontal duct connection
- V: Vertical duct connection

Nominal sizes

- 300, 400, 500, 600, 625

Attachments

- M: Damper blade for volume flow rate balancing
- MN: Pressure tap and cord-operated damper blade for volume flow rate balancing with the diffuser face in place

Accessories

- Lip seal

Special characteristics

- High induction results in a rapid reduction of temperature differences and airflow velocities
- For all types of ceiling systems, and with an extended border also suitable for freely suspended installation
- Horizontal or vertical duct connection
- Air change rates of up to 35 per hour can be achieved by arranging several diffusers in a row with a minimum pitch of 0.9 m (centre line to centre line)

Parts and characteristics

- Circular or square diffuser face
- Diffuser face with radially arranged fixed air control blades
- Plenum box for supply air, with an optimised equalising element that ensures a uniform airflow through the diffuser face
- Simple installation of the diffuser face due to central fixing screw with decorative cap
- Damper blade for volume flow rate balancing (optional)

Construction features

- Spigot suitable for circular ducts to EN 1506 or EN 13180
- Spigot with groove for lip seal (if accessory lip seal has been ordered)

Materials and surfaces

- Diffuser face made of galvanised sheet steel
- V, H: Plenum box and cross bar made of galvanised sheet steel
- Lip seal made of rubber
- Diffuser face powder-coated RAL 9010, pure white
- P1: Powder-coated, RAL CLASSIC colour

Installation and commissioning

- Preferably for rooms with a clear height up to 4.0 m
- Flush ceiling installation
- Freely suspended installation only with an extended border (supply air variant)
- Horizontal or vertical duct connection
- If necessary, carry out volume flow rate balancing with damper blade

Standards and guidelines

- Sound power level of the air-regenerated noise measured according to EN ISO 5135

Maintenance

- Maintenance-free as construction and materials are not subject to wear
- Inspection and cleaning to VDI 6022

Technical data

Nominal sizes	300, 400, 500, 600, 625 mm
Minimum volume flow rate, with $\Delta t_z = -6$ K	9 – 28 l/s or 31 – 102 m³/h
Maximum volume flow rate, with $L_{WA} \approx 50$ dB(A)	70 – 235 l/s or 252 – 846 m³/h
Supply air to room air temperature difference	–12 to +10 K

Function

Functional description


Ceiling swirl diffusers in air conditioning systems create a swirl to supply air to rooms. The resulting airflow induces high levels of room air, thereby rapidly reducing the airflow velocity and the temperature difference between supply air and room air. Ceiling swirl diffusers allow for large volume flow rates. The result is a mixed flow ventilation in comfort zones, with good overall room ventilation, creating only very little turbulence in the occupied zone.

Type BBHM ceiling swirl diffusers have fixed blades. Air discharge is horizontal omni directional. The supply air to room air temperature difference may range from -12 to $+10$ K.

A damper blade (optional) simplifies volume flow rate balancing for commissioning. Pressure tap and cord-operated damper blade (optional) allow for volume flow rate balancing with the diffuser face in place.

To give rooms an aesthetic, uniform look, Type BBHM diffusers may also be used for extract air.


Schematic illustration of the BBHM with plenum box for horizontal duct connection

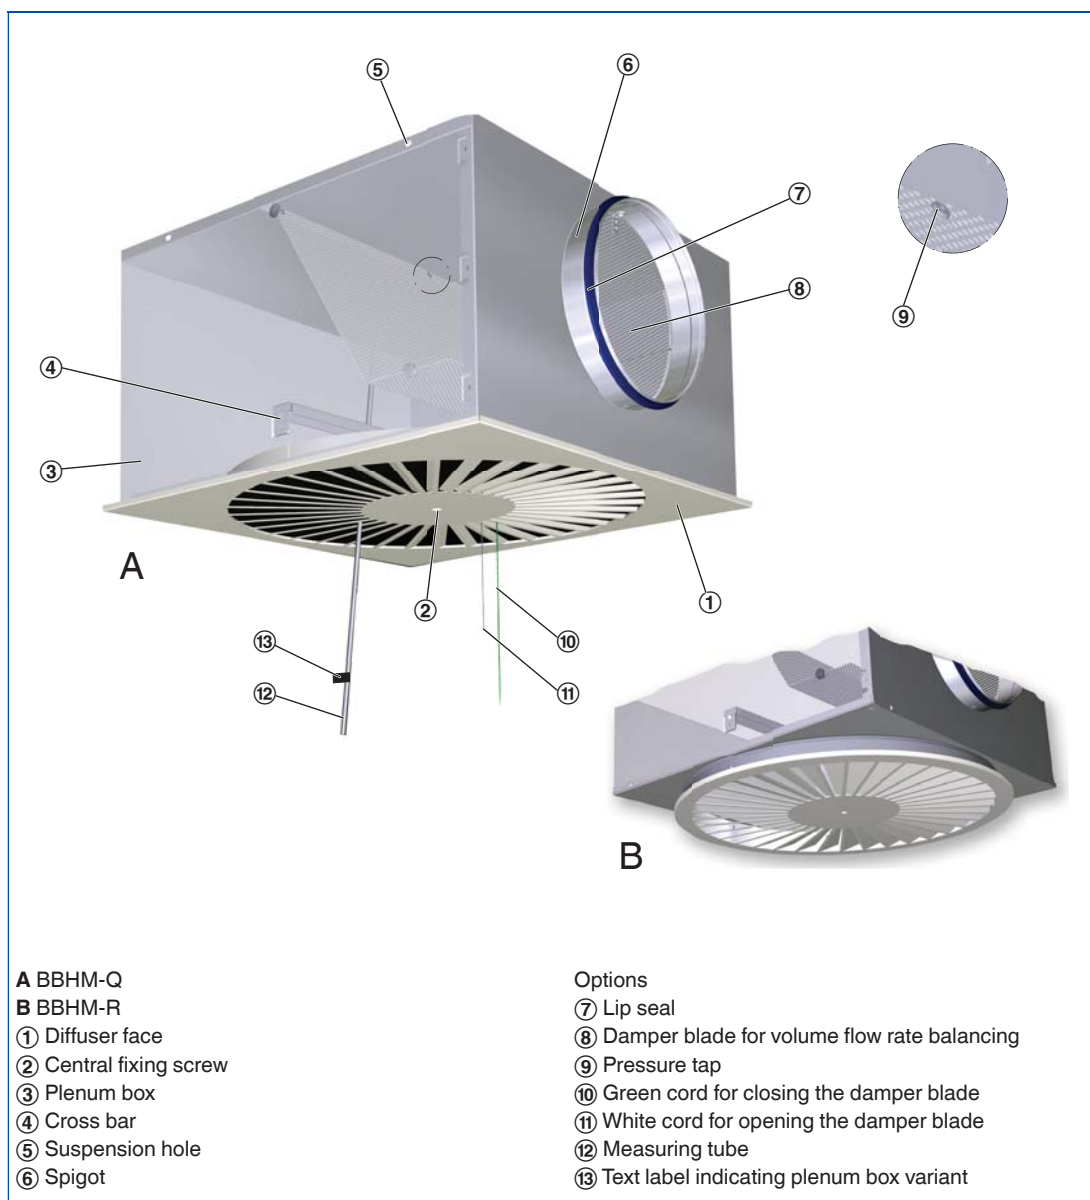

Air patterns

Horizontal air discharge

Horizontal omni directional air discharge

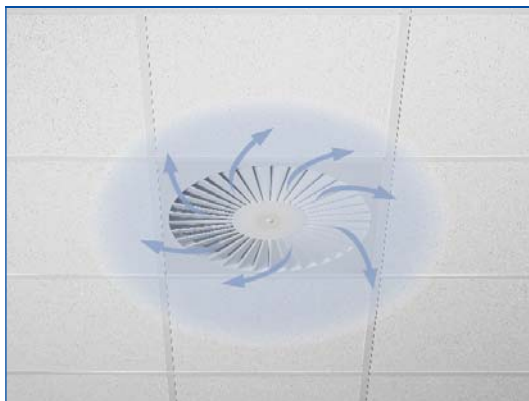

1

BBHM*-Z-H (supply air)

Quick sizing tables provide a good overview of the volume flow rates and corresponding sound power levels and differential pressures.

The minimum volume flow rates apply to a supply air to room air temperature difference of –6 K.

The maximum volume flow rates apply to a sound power level of approx. 50 dB (A) with damper blade position 0°.

Exact values for all parameters can be determined with our Easy Product Finder design programme.

Quick sizing – sound power level and total differential pressure


Nominal size	$\dot{V}$		Damper blade position					
			0°		45°		90°	
			Δp_t	L_{WA}	Δp_t	L_{WA}	Δp_t	L_{WA}
	l/s	m³/h	Pa	dB(A)	Pa	dB(A)	Pa	dB(A)
300	9	31	1	<15	1	<15	2	<15
	35	126	13	28	17	27	27	27
	55	198	31	39	41	40	67	39
	80	288	67	50	87	54	142	54
400	16	59	1	<15	1	<15	2	<15
	60	216	10	24	14	25	27	26
	105	378	32	39	42	40	83	44
	145	522	60	50	81	53	158	57
500	24	85	1	<15	2	<15	4	<15
	80	288	12	24	19	26	43	29
	135	486	33	39	53	41	123	45
	185	666	62	50	99	54	231	58
600, 625	28	102	1	<15	1	<15	3	<15
	95	342	10	25	15	25	29	24
	160	576	28	39	41	40	81	39
	225	810	55	50	81	52	160	53

BBHM*-Z-V (supply air)

Quick sizing – sound power level and total differential pressure

Nominal size	$\dot{V}$		Damper blade position					
			0°		45°		90°	
			Δp_t	L_{WA}	Δp_t	L_{WA}	Δp_t	L_{WA}
	l/s	m³/h	Pa	dB(A)	Pa	dB(A)	Pa	dB(A)
300	9	31	1	<15	1	<15	2	<15
	30	108	9	25	11	25	19	25
	50	180	26	38	32	38	54	38
	70	252	51	49	62	49	106	49
400	16	59	1	<15	1	<15	2	<15
	60	216	10	24	13	23	23	24
	105	378	31	39	40	39	72	42
	145	522	60	50	77	51	138	55
500	24	85	1	<15	1	<15	4	<15
	80	288	11	24	14	23	44	29
	130	468	28	38	36	39	117	44
	180	648	54	50	70	53	223	56
600, 625	28	102	1	<15	1	<15	2	<15
	95	342	9	25	12	24	28	27
	160	576	26	40	35	41	78	44
	220	792	50	51	67	55	148	57

1




BBHM-Q

– Q –

Order code detail

Diffuser face BBHM-Q

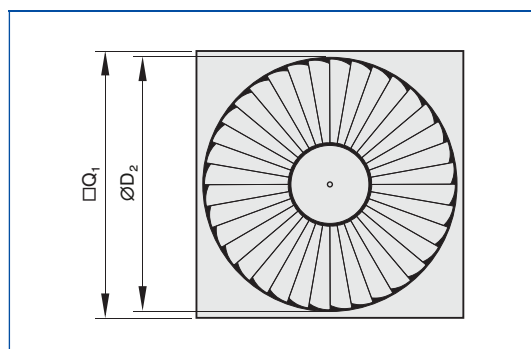

Dimensions

Nominal size	□Q ₁	ØD ₂	A _{eff}
	mm		m ²
300	298	250	0.0088
400	398	350	0.0180
500	498	450	0.0251
600	598	538	0.0295
625	623	538	0.0295

BBHMQ-*-H

– Q – * – H –

Order code detail

Variant

- Ceiling swirl diffuser with square diffuser face
- With plenum box for horizontal duct connection

Nominal sizes

- 300, 400, 500, 600, 625


Parts and characteristics

- Square diffuser face
- Plenum box for horizontal duct connection
- Square opening to accommodate the diffuser face
- Equalising element that ensures a uniform airflow through the diffuser face (supply air variant)
- Simple installation of the diffuser face due to central fixing screw with decorative cap
- Damper blade for volume flow rate balancing (optional)
- Pressure tap and cord-operated damper blade for volume flow rate balancing (optional)
- Lip seal (optional)

Construction features

- Spigot suitable for circular ducts to EN 1506 or EN 13180
- Spigot with groove for lip seal (if accessory lip seal has been ordered)

Square diffuser face with plenum box
for horizontal duct connection

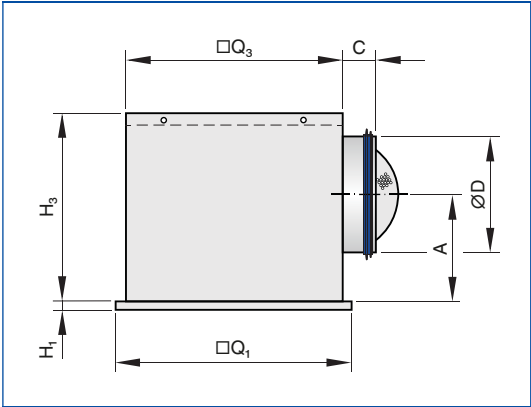

Dimensions [mm] and weight [kg]

Nominal size	□Q ₁	H ₁	□Q ₃	H ₃	ØD	A	C	Plenum box	m
	mm								kg
300	298	8	290	250	158	139	50	AK-Uni-001	4.0
400	398	8	372	295	198	164	50	AK-Uni-002	6.2
500	498	8	476	295	198	164	50	AK-Uni-003	8.5
600	598	8	567	345	248	199	48	AK-Uni-004	11.6
625	623	8	567	345	248	199	48	AK-Uni-004	11.9

Weights apply to the supply air variant

BBHM-Q-* -V

– Q – * – V –

Order code detail

Variant

- Ceiling swirl diffuser with square diffuser face
- With plenum box for vertical duct connection

Nominal sizes

- 300, 400, 500, 600, 625


Parts and characteristics

- Square diffuser face
- Plenum box for vertical duct connection
- Circular opening to accommodate the diffuser face
- Equalising element that ensures a uniform airflow through the diffuser face (supply air variant)
- Simple installation of the diffuser face due to central fixing screw with decorative cap
- Damper blade for volume flow rate balancing (optional)
- Lip seal (optional)

Construction features

- Spigot suitable for circular ducts to EN 1506 or EN 13180
- Spigot with groove for lip seal (if accessory lip seal has been ordered)

Square diffuser face with plenum box for vertical duct connection

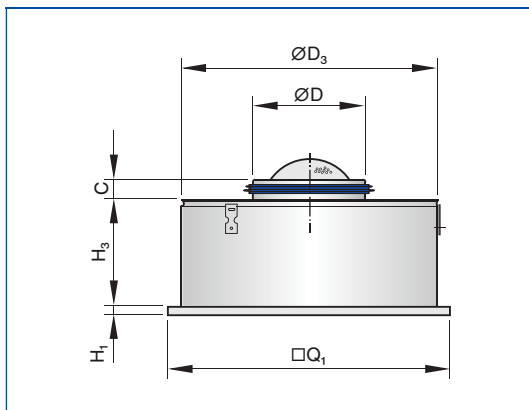

Dimensions [mm] and weight [kg]

Nominal size	□Q ₁	H ₁	ØD ₃	H ₃	ØD	C	m
	mm						kg
300	298	8	275	200	158	50	3.0
400	398	8	364	200	198	50	4.7
500	498	8	462	200	198	50	6.7
600	598	8	559	200	248	48	8.9
625	623	8	559	200	248	48	9.2

Weights apply to the supply air variant

1




BBHM-R

– R –

Order code detail

Diffuser face BBHM-R

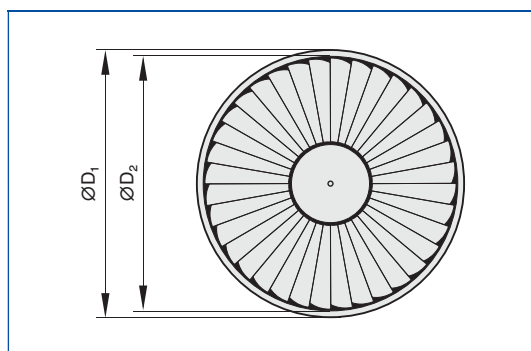

Dimensions

Nominal size	ØD ₁	ØD ₂	A _{eff}
	mm		m ²
300	300	250	0.0088
400	400	350	0.0180
500	500	450	0.0251
600	600	538	0.0295
625	625	538	0.0295

BBHM-R*-H

– R – * – H –

Order code detail

Variant

- Ceiling swirl diffuser with circular diffuser face
- With plenum box for horizontal duct connection

Nominal sizes

- 300, 400, 500, 600, 625


Parts and characteristics

- Circular diffuser face
- Plenum box for horizontal duct connection
- Circular opening to accommodate the diffuser face
- Equalising element that ensures a uniform airflow through the diffuser face (supply air variant)
- Simple installation of the diffuser face due to central fixing screw with decorative cap
- Damper blade for volume flow rate balancing (optional)
- Pressure tap and cord-operated damper blade for volume flow rate balancing (optional)
- Lip seal (optional)

Construction features

- Spigot suitable for circular ducts to EN 1506 or EN 13180
- Spigot with groove for lip seal (if accessory lip seal has been ordered)

Circular diffuser face with plenum box
for horizontal duct connection

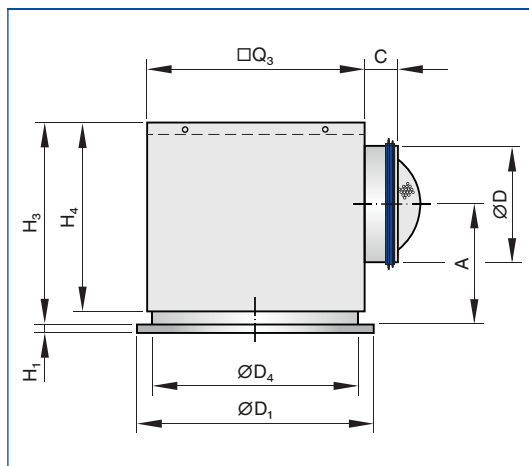

Dimensions [mm] and weight [kg]

Nominal size	ØD ₁	H ₁	□Q ₃	H ₃	ØD ₄	H ₄	ØD	A	C	Plenum box	m
	mm										kg
300	300	8	290	285	278	250	158	174	50	AK-Uni-013	4.2
400	400	8	372	330	362	295	198	199	50	AK-Uni-014	6.5
500	500	8	476	330	460	295	198	199	50	AK-Uni-015	9.0
600	600	8	567	380	557	345	248	234	48	AK-Uni-016	12.3
625	625	8	567	380	557	345	248	234	48	AK-Uni-016	12.5

Weights apply to the supply air variant

BBHM-R-* -V

– R – * – V –

Order code detail

Variant

- Ceiling swirl diffuser with circular diffuser face
- With plenum box for vertical duct connection

Nominal sizes

- 300, 400, 500, 600, 625


Parts and characteristics

- Circular diffuser face
- Plenum box for vertical duct connection
- Circular opening to accommodate the diffuser face
- Equalising element that ensures a uniform airflow through the diffuser face (supply air variant)
- Simple installation of the diffuser face due to central fixing screw with decorative cap
- Damper blade for volume flow rate balancing (optional)
- Lip seal (optional)

Construction features

- Spigot suitable for circular ducts to EN 1506 or EN 13180
- Spigot with groove for lip seal (if accessory lip seal has been ordered)

Circular diffuser face with plenum box for vertical duct connection

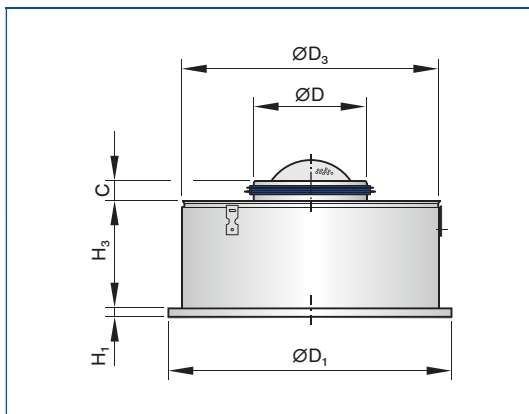

Dimensions [mm] and weight [kg]

Nominal size	ØD ₁	H ₁	ØD ₃	H ₃	ØD	C	m
	mm						kg
300	300	8	275	200	158	50	2.8
400	400	8	364	200	198	50	4.4
500	500	8	462	200	198	50	6.3
600	600	8	559	200	248	48	8.5
625	625	8	559	200	248	48	8.7


Weights apply to the supply air variant

Installation types


For more installation details see Chapter K1 – 1.6.

These are only schematic diagrams to illustrate installation details.

Flush ceiling installation with square plenum box

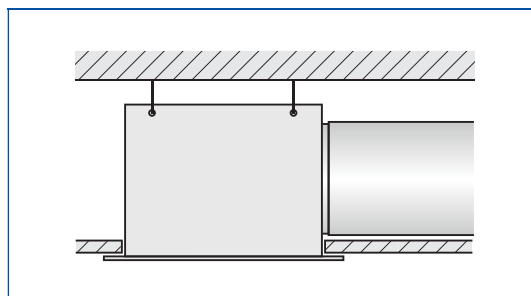


Freely suspended installation

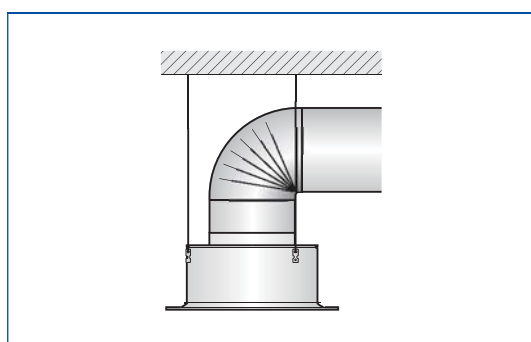


Ceiling systems


Grid ceiling



Continuous ceiling




T-bar ceiling




Diffuser face sealing and fixing

Diffuser face – sealing

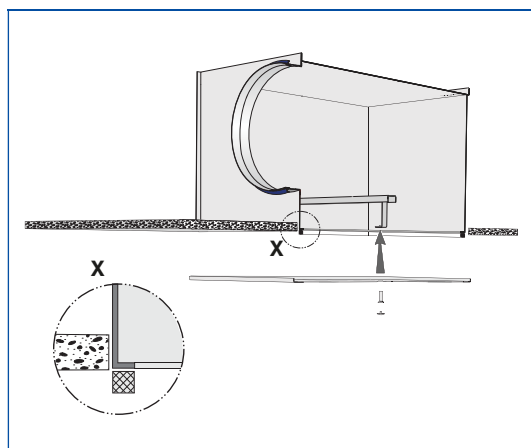

Diffuser face – central screw fixing

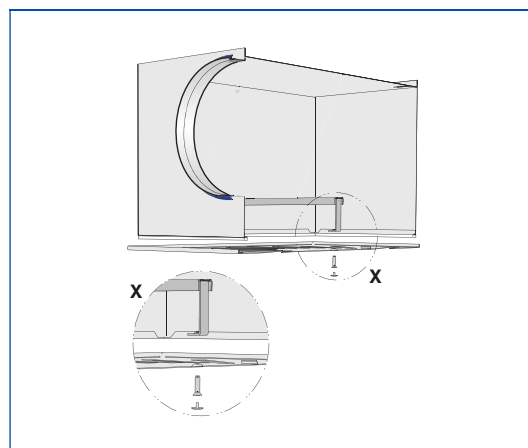

Standard text

This specification text describes the general properties of the product. Texts for variants can be generated with our Easy Product Finder design programme.

Ceiling swirl diffusers with square or circular diffuser face. Supply air and extract air variants for comfort zones. Diffuser face with fixed air control blades for horizontal swirling supply air discharge creating high induction levels. For installation into all types of suspended ceilings.

Ready-to-install component which consists of the casing, diffuser face, spigot, and a cross bar to which the diffuser face is fixed. The diffuser face is fixed to the cross bar with a central screw.

Spigot suitable for ducts to EN 1506 or EN 13180.

Sound power level of the air-regenerated noise measured according to EN ISO 5135.

Special characteristics

- High induction results in a rapid reduction of temperature differences and airflow velocities
- For all types of ceiling systems, and with an extended border also suitable for freely suspended installation
- Horizontal or vertical duct connection
- Air change rates of up to 35 per hour can be achieved by arranging several diffusers in a row with a minimum pitch of 0.9 m (centre line to centre line)

Materials and surfaces

- Diffuser face made of galvanised sheet steel
- V, H: Plenum box and cross bar made of galvanised sheet steel
- Lip seal made of rubber
- Diffuser face powder-coated RAL 9010, pure white
- P1: Powder-coated, RAL CLASSIC colour

Technical data

- Nominal sizes: 300, 400, 500, 600, 625 mm
- Minimum volume flow rate, with $\Delta t_z = -6$ K: 9 – 28 l/s or 31 – 102 m³/h
- Maximum volume flow rate, with $L_{WA} \approx 50$ dB(A): 70 – 235 l/s or 252 – 846 m³/h
- Supply air to room air temperature difference: –12 to +10 K

Sizing data

- $\dot{V}$ _____ [m³/h]
- Δp_t _____ [Pa]
- L_{WA} Air-regenerated noise _____ [dB(A)]